


THE COLLECTIONS


FOREST 5Plus




OAKS 3Plus

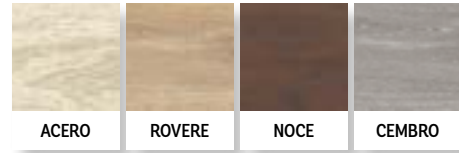

BUXY * 3mm- 3Plus - 5Plus

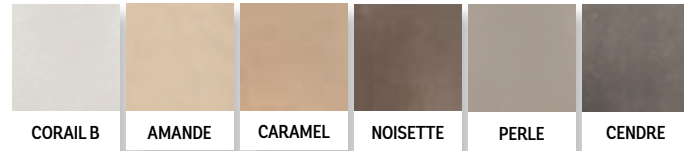


EXEDRA * 3Plus

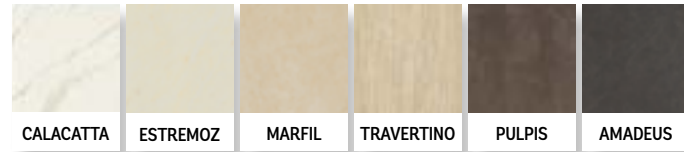

OVER* 3mm - 3Plus



ELEGANCE * 3mm - 3Plus

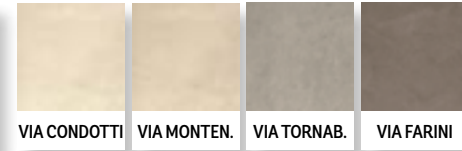


GEOQUARTZ 3Plus




AVANTAGARDE 3mm - 3Plus



BLACK-WHITE 3Plus

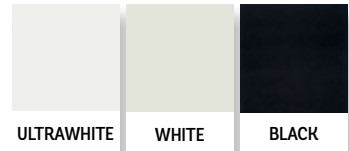

COLORS 3mm

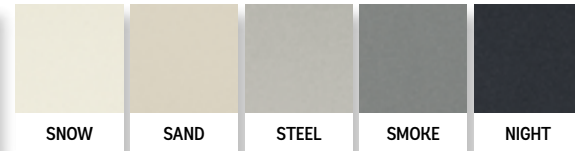

MATERICA * 5Plus



* ALSO AVAILABLE IN THE 14 MM THICK VERSION



THE NEW SURFACE
FOR ARCHITECTURE

COTTO D'ESTE | BEAUTY
Nuove Superfici | IN CERAMICS

Via Emilia Romagna, 31 41049 Sassuolo (MO) Italy
+39 0536 814 911 fax +39 0536 814 918
cottodeste.it - info@cottodeste.it
PANARIAGROUP INDUSTRIE CERAMICHE S.p.A.

FOLLOW US ON:



RENOVATE
YOUR HOME
WHITOUT
DEMOLISHING

A **UNIQUE**
PRODUCT
IN **THREE**
DIFFERENT
THICKNESSES

Kerlite
3mm

ULTRA THIN
PORCELAIN
STONEWARE

Pure laminated
porcelain stoneware
for wall installation
only.

Kerlite
3plus

ULTRA THIN
PORCELAIN
STONEWARE

With fiberglass mesh
reinforcement, ideal for
residential floors and for
installation on existing
floor coverings.

Kerlite
5plus

EXTRA THIN
PORCELAIN
STONEWARE

Excellent resistance,
ideal for installation in
environments subject
to heavy traffic and
on new screeds.


5,5 mm

3,5 mm

3 mm

Kerlite[®] AN INNOVATIVE PRODUCTION PROCESS

SLABS PRESSED ON CONTINUOUS BELTS
AND NOT TILES SHAPED IN CONVENTIONAL DIES

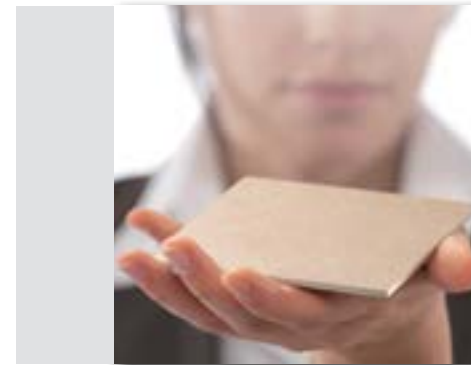


THIN AND LIGHT

Slabs of Kerlite are particularly thin and
have a weight of only:
7.4 kg/m², Kerlite 3mm
7.8 kg/m², Kerlite 3Plus
13.2 kg/m², Kerlite 5Plus




LARGE

A range of slabs with sizes up to 3 x
1 metres. The perfection of the slabs
allows for installation with extremely
narrow joints of only 1 mm.

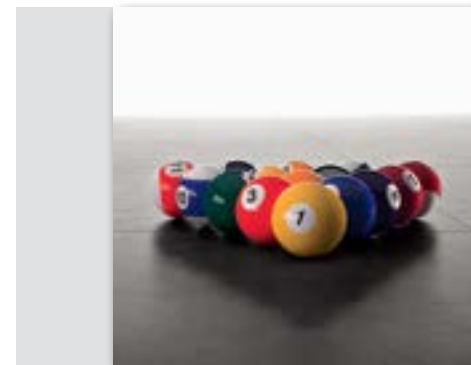


FLAT

The innovative production process of
Kerlite, which is pressed on a continuous
belt, allows us to produce perfectly flat
slabs.

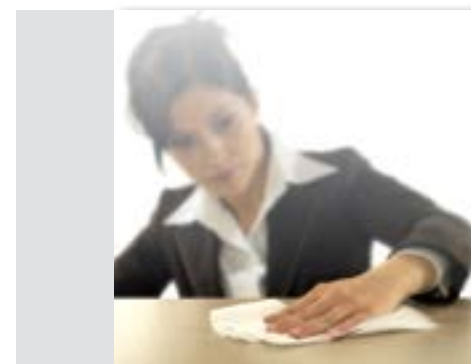


EASY TO CLEAN

Kerlite is non-absorbent, easy to clean and
resists acid, stains and pollution.

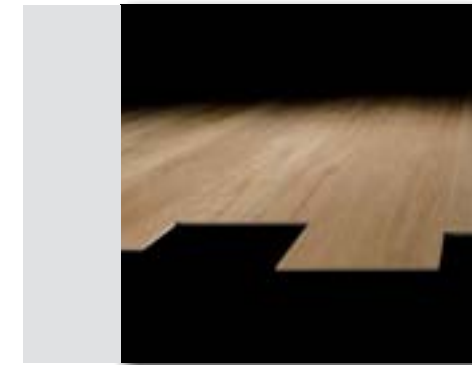


EASY TO INSTALL

Thin and light, easy to cut and drill,
processing time reduced by 40% with
respect to traditional tile.

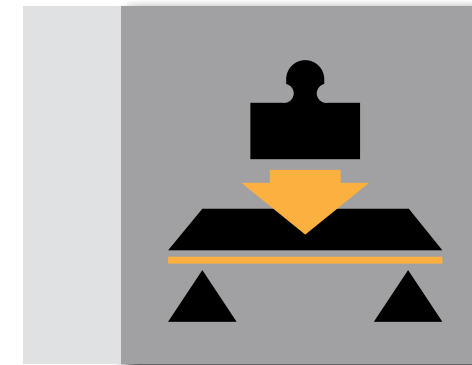


RESISTANT

Perfectly compact and pressed at a
force of 15,000 tons, Kerlite 5plus
resists breaking loads of up to 1200
Newton.

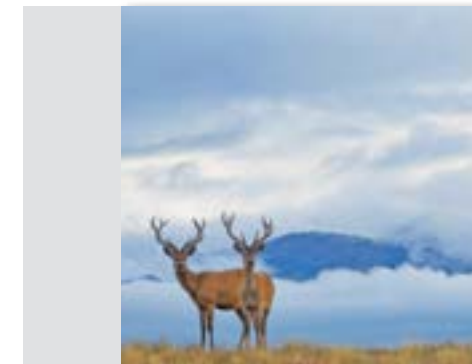

ECOFRIENDLY

An ecocompatible production process:
- consumption of raw materials and
water reduced by 70%; reduced energy
consumption, -50% of natural gas and an
emission of CO₂ that is 20 times lower
than the requirements of Italian laws, in
compliance with the Kyoto Protocol.

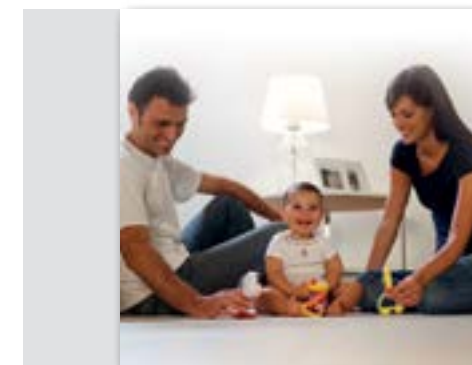

ANTIBACTERIAL



Round-the-clock antibacterial
protection.
Eliminates up to 99.9% of bacteria.
Available for the MATERICA, FOREST,
EXEDRA NAT. and EXEDRA SOFT series.



GUARANTEED

The beauty and extraordinary
quality of our floors are values that
resist time: resistance of surfaces
to wear and frost is guaranteed for
20 years.